


- Lightweight and durable
- Ergonomic handle
- Variable operating lengths available
- Nozzles for different compressor sizes
- Cold handle and trigger mechanism
- Adjustable auxiliary handle
- Adjustable air flow trigger
- PEHD insulated shaft
- Independently tested to 75 kV / ft
- Debris cone (adjustable)
- Non-sparking tip
- No H.A.V.S. 0m/s<sup>2</sup>
- Tested to 40 bar



For a full list of AIR-EX kits, attachments and spares visit the **PARTS SHOP**

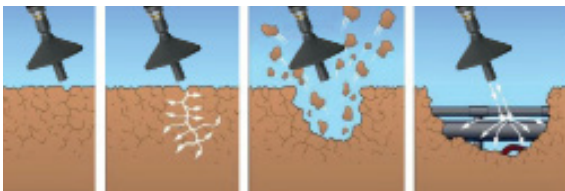

REGISTERED DESIGN  
DN/233174

## TECHNICAL DATA

Handle	AIR-EX 2.0	AIR-EX 2.0
Shaft Type	TYPE 1	TYPE 2
Part No.*	VX-AE-01	VX-AE-02
Weight*	2.9 kg (6.3 lbs)	4.15 kg (9.1 lbs)
Length*	1.180 m (46.5 in)	2.190 m (86.2 in)
Shaft Diameter ø	51 mm (1.96 in)	
H.A.V.S.	0 m/s <sup>2</sup> - No Vibration	
Claw Coupling**	UK Standard	
Compressor Requirements:	4-15 bar (58 - 217 psi)	
	2.265 - 5.097 l/min	
Nozzle Tip	Brass Non-Sparking	
Test Voltage	75 kV Per Foot	
IEEE 516-2021	Compliant	
EN 61235	Compliant	
Tested Working Pressure:	Max. 40 bar	

\*Excludes nozzle.  
\*\*Other regional variants are available on request  
Tool weight can vary depending on specification.

For more information

